



# Alfa Laval MA30-S

## Gasketed plate-and-frame heat exchanger for fibrous fluids

Alfa Laval WideGap is used for fibrous liquids, for highly viscous fluids and for fluids containing coarse particles. The wide gaps between the plates, the plate pattern and the smooth port design allow fluids with fibres and particles to easily flow through the heat exchanger.

The available channel gap sizes for this model are:

- wide/narrow 11/5 mm (0.43/0.20 inches)
- wide/wide 11/11 mm (0.43/0.43 inches)

### Applications

- Biotech and Pharmaceutical
- Chemicals
- Energy and Utilities
- Mining, Minerals and Pigments
- Pulp and Paper
- Water and Waste treatment

### Benefits

- Maximum uptime for fouling applications
- High energy efficiency – low operating cost
- Flexible configuration – heat transfer area can be modified
- Easy to install – compact design
- High serviceability – easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

### Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features:

- 5-point alignment system
- Reinforced hanger
- Chocolate pattern distribution area
- Glued gasket
- Leak chamber
- Bearing box
- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- Lock washer
- Pressure plate roller
- Tightening bolt cover



### Extending performance

#### with Alfa Laval 360° Service Portfolio

Our extensive services ensure top performance from your Alfa Laval equipment throughout its life cycle. The availability of parts and our team's commitment and expertise bring you peace of mind.

#### Start-up

- Installation
- Installation Supervision
- Commissioning

#### Maintenance

- Cleaning Services
- Reconditioning
- Repair
- Service Tools
- Spare Parts

#### Support

- Exclusive Stock
- Technical Documentation
- Telephone Support
- Training
- Troubleshooting

#### Improvements


- Equipment Upgrades
- Redesign
- Replacement and Retrofit

#### Monitoring

- Condition Audit
- Performance Audit

## Dimensional drawing

Measurements mm (inches)

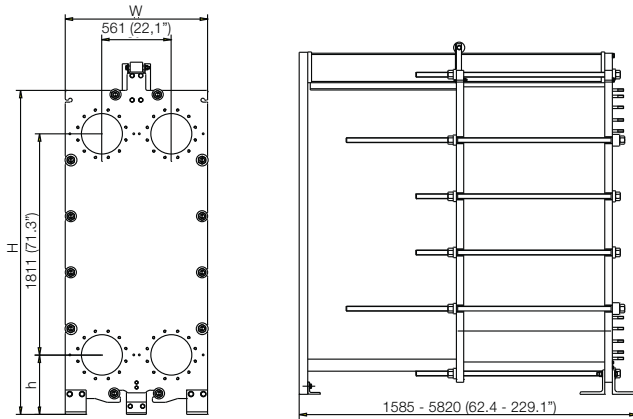

Type	H	W	h
MA30-FM	2882 (113.5")	1170 (46.1")	485 (19.1")
MA30-FG	2918 (114.9")	1170 (46.1")	521 (20.5")

## Technical data

### Plates

Name	Type	Free channel, mm (inches)
MA30-S	Wide-gap	11 / 11 (0.43/0.43) wide/narrow
MA30-SM	Wide-gap	11 / 5 (0.43/0.20) wide/wide

### Materials

Heat transfer plates	316/316L Ti
Field gaskets	NBR, EPDM
Flange connections	Carbon steel Metal lined: stainless steel, titanium
Frame and pressure plate	Carbon steel, epoxy painted

Other materials may be available on request.

All option combinations may not be configurable.

## Operational data

Frame, PV-code	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FM, ASME	6.9/100	180/356
FM, PED	10.0/145	160/320 (160/320)
FG, ASME	10.7/155	250/482
FG, PED	16.0/232	210/410

Extended pressure and temperature rating may be available on request.

### Flange connections

FM, ASME	ASME B16.5 Class 150 NPS 14/NPS 12
FM, PED	EN 1092-1 DN350/DN300 PN10 ASME B16.5 Class 150 NPS 14/NPS 12
FG, ASME	ASME B16.5 Class 150 NPS 14/NPS 12
FG, PED	EN 1092-1 DN350/DN300 PN16 ASME B16.5 Class 150 NPS 14/NPS 12

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T 9115.

### How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.